


Model No.	OSPN-W/2710(Body Color:White)	OSPN-S/2710(Body Color:Silver)[受注生産品]
	OSPN-B/2710(Body Color:Black)	

Beam Angle | 10°~30° 配光調整可能


Figure




Light source	LED
LED Type	COB
Power consumption	10.0W
Luminous flux	10°mode : 566 lm 22°mode : 539 lm 32°mode : 511 lm
Color temperature	2700K
Ra	94

Light distribution data


10°mode

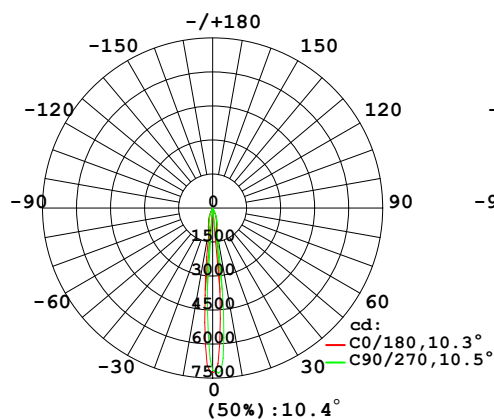

22°mode

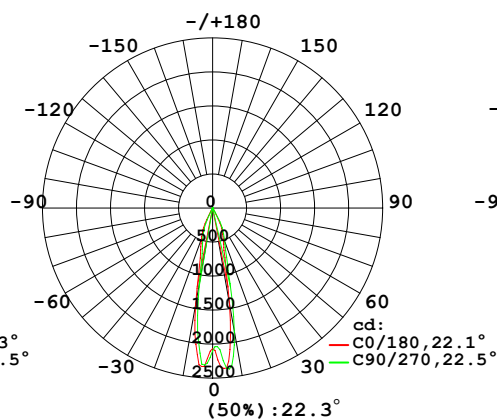

32°mode

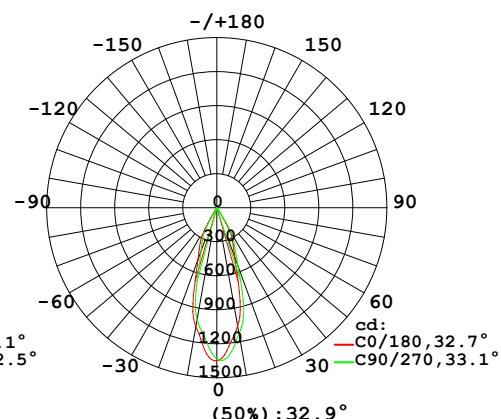

Height (m)	Average Illuminance (lx)	Direct Illuminance (lx)	Beam Diameter (cm)
1m	4752 lx	7321 lx	18.06cm
2m	1188 lx	1830 lx	36.12cm
3m	528 lx	813 lx	54.19cm
4m	297 lx	458 lx	72.25cm
5m	190 lx	293 lx	90.31cm

Height (m)	Average Illuminance (lx)	Direct Illuminance (lx)	Beam Diameter (cm)
1m	1694 lx	2388 lx	39.03cm
2m	424 lx	597 lx	78.05cm
3m	188 lx	265 lx	117.08cm
4m	106 lx	149 lx	156.11cm
5m	68 lx	96 lx	195.13cm

Height (m)	Average Illuminance (lx)	Direct Illuminance (lx)	Beam Diameter (cm)
1m	906 lx	1350 lx	58.66cm
2m	226 lx	338 lx	117.33cm
3m	101 lx	150 lx	175.99cm
4m	57 lx	84 lx	234.66cm
5m	36 lx	54 lx	293.32cm